COZY CABS

MOUNTING INSTRUCTIONS

With Parts Listing
and Drawings for

JOHN DEERE 4-12963 Cab

TO FIT

F-910, F-911, F-912, F-915, F-930, F-932, F-935, F-1145

MOUNTING KITS:

4-11847	F-900 Series Serial #86-360000 and down
4-11846	F-900 Series Serial #86-360001 and up
4-12694	F-1145

OPTIONAL KITS:

4-10693	Flasher Kit (Roof Mounted)
4-11626	Flasher Kit (Side Mounted)
4-10865	Front Work Light Kit
4-10993	Defroster Fan Kit
4-10359	Directional Light Kit
4-11848	Heater Kit (F915, F935 & F1145 only)
4-11849	Pantographic Wiper Kit

CUSTOM PRODUCTS
OF LITCHFIELD, INC.
Box 718
Litchfield, Minnesota 55355
(612) 693-3221

November 1995
05-10131

SAFETY INSTRUCTIONS

Read operator's manual. Be thoroughly familiar with the controls, capabilities, and proper use of the equipment.

NEVER ALLOW ANY RIDERS.

Thoroughly inspect Roll Bar and Roll Bar Mounting periodically.

Stay alert for hidden hazards and traffic.

Avoid sudden starts, excessive speeds, and sudden stops when operating on hillside, rough ground and most off-the-road operations.

Use extreme care when working close to fences, ditches, or on hillsides.

Wait for mower to STOP before dismounting.

Check clearance carefully before driving under any objects.

Avoid operating sideways on a steep slope whenever possible.

ALWAYS buckle safety belt while operating tractor.

Never exceed factory recommended specifications.

Do not weld, cut, drill or modify ROPS in any manner unless instructed by manufacturer.

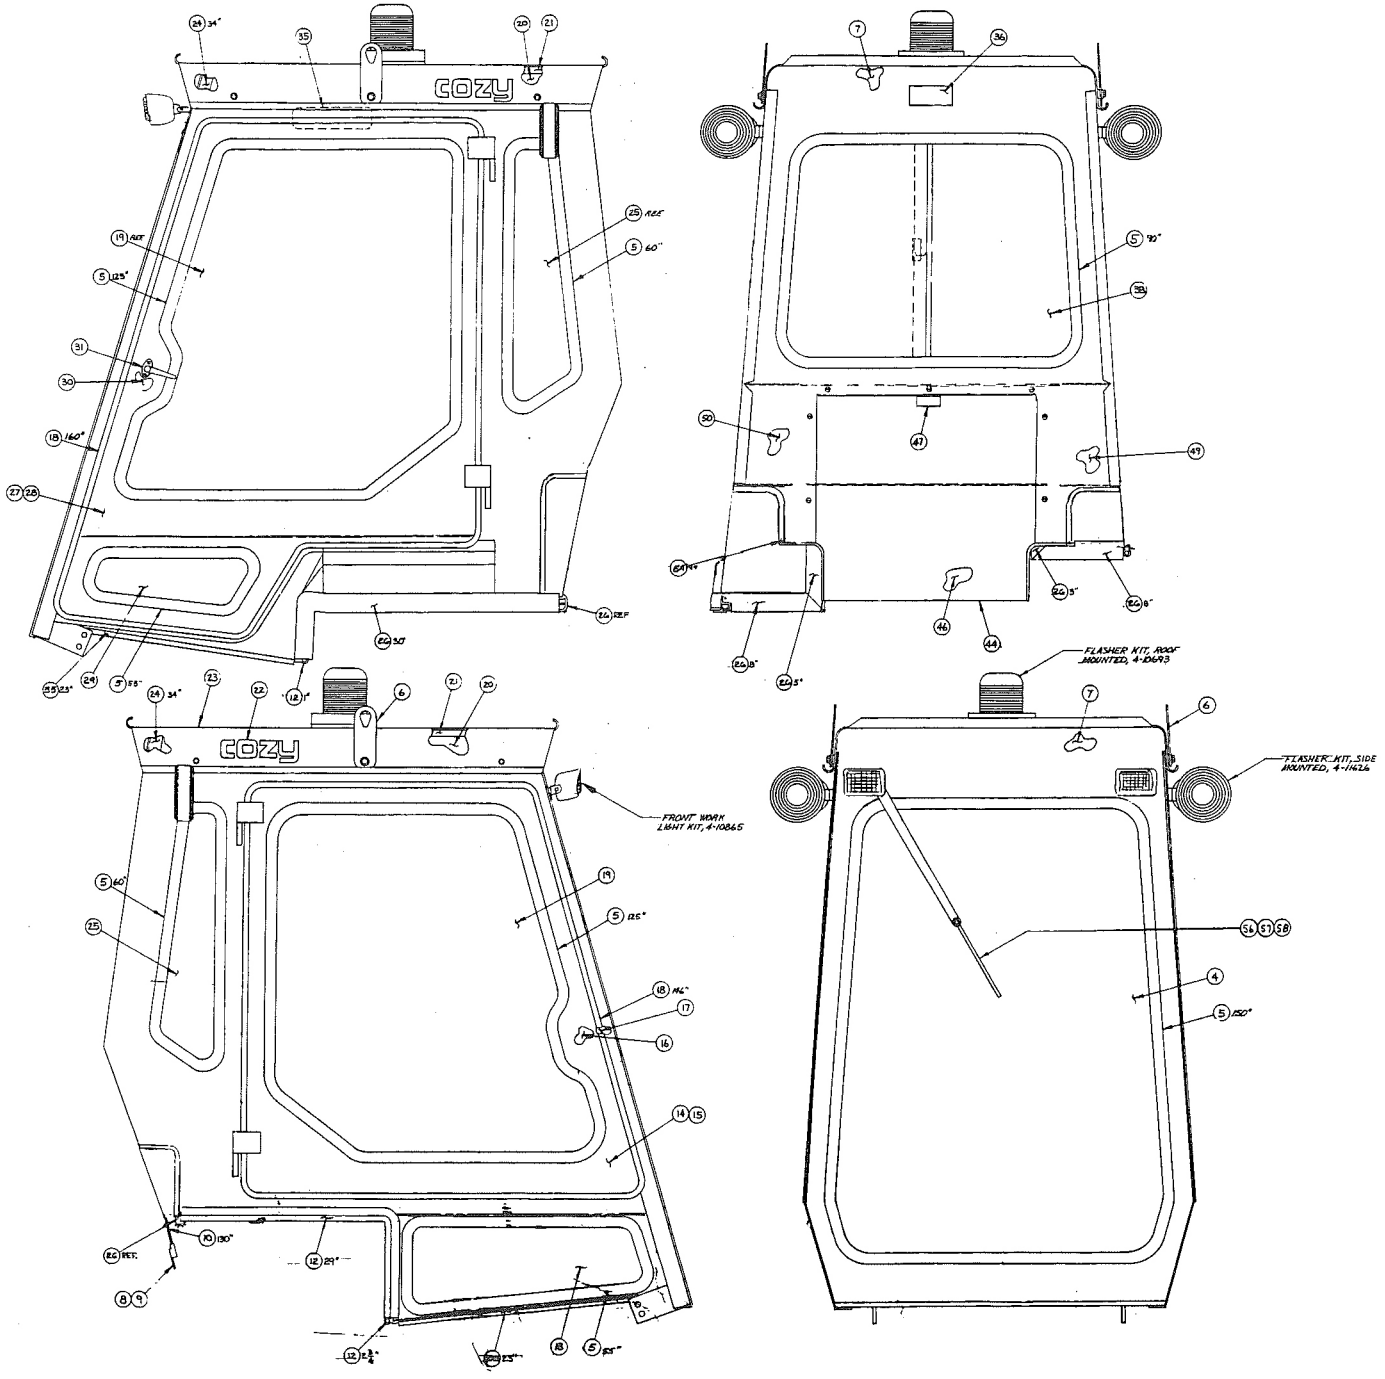

Total Cab to Machine Seals

Item #	Part #	Amount
12	3-10610	3 Feet
26	3-10611	7 Feet
54	3-10777	4 Feet
55	3-12138	4 Feet

REPLACEMENT PARTS FOR JOHN DEERE
F-910, F-915, F-930, F-935, F-1145 CAB
(4-23963)

ITEM NO.	QTY.	PART NO.	DESCRIPTION
4**	1	3-13387	Glass, windshield
5*	A.R.	3-10649	1/8" offset window rubber
6	2	1-20618	Lifting ear
7	2	1-25621	Insulation, roof, front & rear
8	1	3-13447	Connector, plastic
9	1	3-13448	Terminal, sliding, 14-16 ga.
10*	A.R.	3-10351	Wire, 12 ga., red
12*	A.R.	3-10610	Small straight bubble rubber
13**	1	3-13444	Glass, lower right side
14	1	2-12647	Swingout weldment
15	1	4-11631	Swingout assembly
16	1	3-11127	Inside door latch
17	2	1-10247	Door striker
18*	A.R.	3-12138	Door seal rubber
19**	2	3-13388	Glass, upper door & swingout
20	2	1-25622	Insulation, roof side
21	1	1-25623	Insulation, roof
22	2	3-11740	Decal, "Cozy"
23	1	1-25373	Roof
24*	A.R.	3-11265	Polyfoam strip, 1/4" x 1"
25**	2	3-13445	Glass, rear side
26*	A.R.	3-10611	Large straight bubble rubber
27	1	2-12648	Door weldment
28	1	4-11632	Door assembly
29**	1	3-13389	Glass, lower door
30	1	3-11128	Door latch
31	1	3-12650	Door handle, outside, non-locking
35	2	4-10055	Door scissor assembly
36	1	3-10579	Decal, Cozy lawn & garden
38	1	3-15700	Aluminum slider window assembly
44	1	1-34716	Lower back panel, removable
46	1	1-34791	Insulation, lower back panel
47	1	3-13443	Decal, to prevent engine failure
49	1	1-25628	Insulation, lower back, left
50	1	1-25629	Insulation, lower back, right
54*	A.R.	3-10777	Pinchweld, small
55*	A.R.	3-12138	Rubber seal, clip on
56	1	3-11091	Wiper arm
57	1	3-11099	Wiper motor
58	1	3-15081	Wiper blade
	1	3-12096	Switch toggle

* A.R. As Required, see illustration. Must be ordered by the foot and cut to fit.
** Custom Products does not supply glass as a replacement part. Purchase glass from a local glass supplier.

MOUNTING INSTRUCTIONS
JOHN DEERE ROPS CAB
F-910, F-911, F-912, F-915, F-930, F-932, F-935

1. Preparation of Tractor.
   A. Remove side access panel of console.
   B. Remove headlights and bellows if so equipped.
   C. Remove seat and suspension.
   D. Remove hydraulic lift lever and float lever.
   E. Tip hood open.
   F. Remove back panel from cab.
   G. The outside rubber brake pedal can be removed for easier installation of cab, Figure #2-A.
2. Installation of Rear Mounts.
   A. Install right and left rear mounts using 12 mm x 110 mm bolts and lockwashers, Figure #1.
   NOTE: On machines with Serial #MOF9--X120001 and up, use 3/8" thick spacers and nuts.

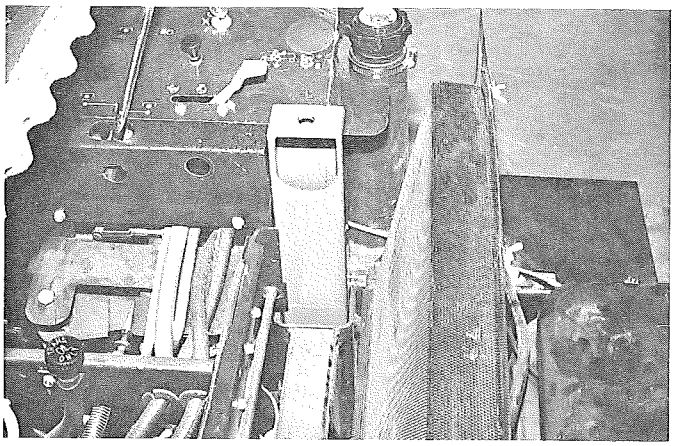

Figure 1

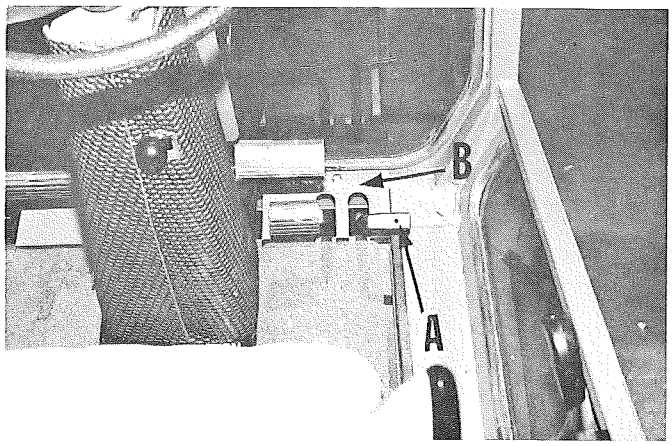

Figure 2

3. Installation of Other Mounting Parts.
   A. If machine was equipped with optional headlights, cover plates will have to be purchased from John Deere and installed to machine as shown in Figures #5 & 6.
   B. Install under seat filler as shown with glue provided, Figure #3.
   NOTE: Cut out seat mounting holes in filler per each seat that comes with tractor.
   C. Install new hydraulic lift and float lever supplied with cab in same manner of original levers.
   NOTE: Longer lever is the float lever and the shorter one is for the implement lift.

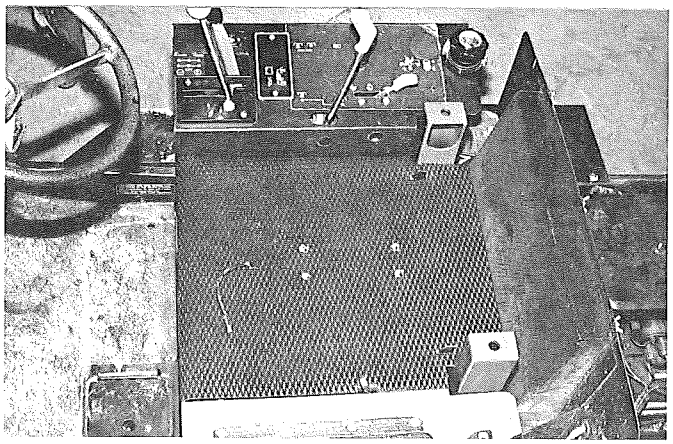

Figure 3

4. Installation of Cab.
   A. Lower cab onto tractor, join rear mounts of cab to tractor rear mounts using 16mm x 40mm bolts and lockwashers, Figure #4-A.

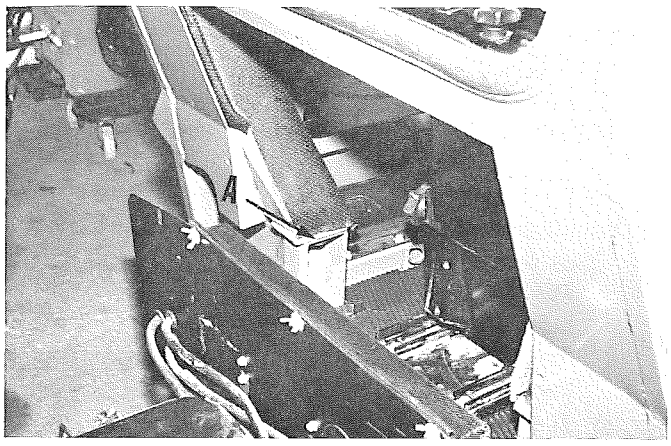

Figure 4

   B. Fasten front of cab to machine using 12mm x 30mm bolts and lockwashers, Figure #5-A.
   NOTE: If snow blower is to be used with cab, install snow blower bracket to left front mounting bolts, Figure #7-A. This is used to prevent any possibility of snow blower breaking the cab windshield. **(Tighten All Mounting Bolts.)**

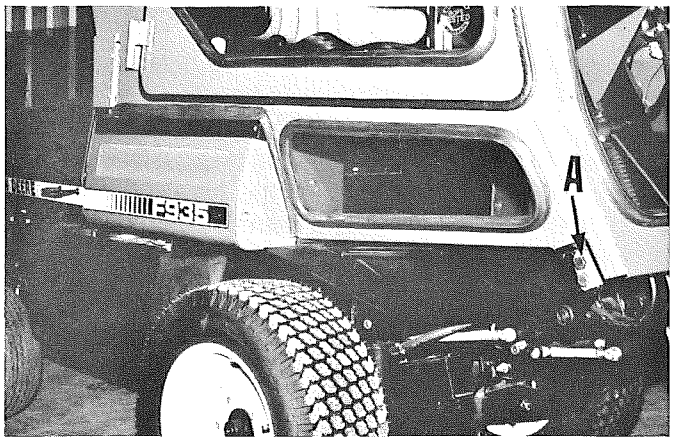

Figure 5

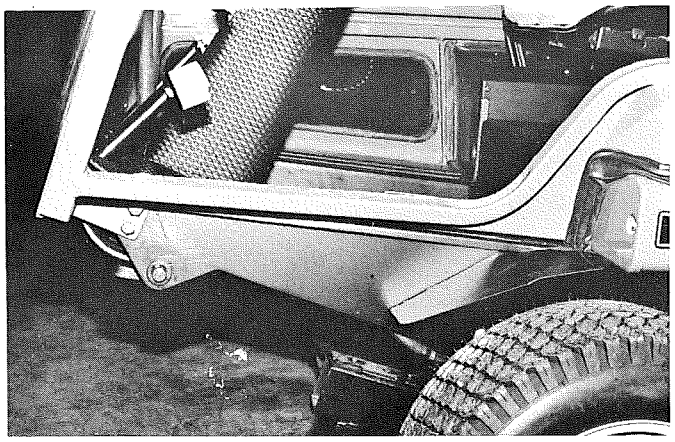

Figure 6

C. Reinstall removable back panel to cab.
NOTE: Follow instructions of decal on back panel.

5. Installation of Electrical, Floor Mat and Steering Console Cover.
   A. The hot wire for the cab options runs down the right rear roll bar leg. Plug this connection into the existing harness of the machine, then replace the access panel on the console.
   B. The engine hood may have to be adjusted to open and close without interference with the cab, Figure #8.
   C. Install the front floor plate. Use 1/4 x 3/4 truss-head screws, lockwashers, and nuts. Install the floor mat and steering console cover. Some trimming may need to be done to ensure a proper fit.
   NOTE: The removable floor plate panel of the cab can be removed when using the mower deck for improved visibility, Figure #2-B.

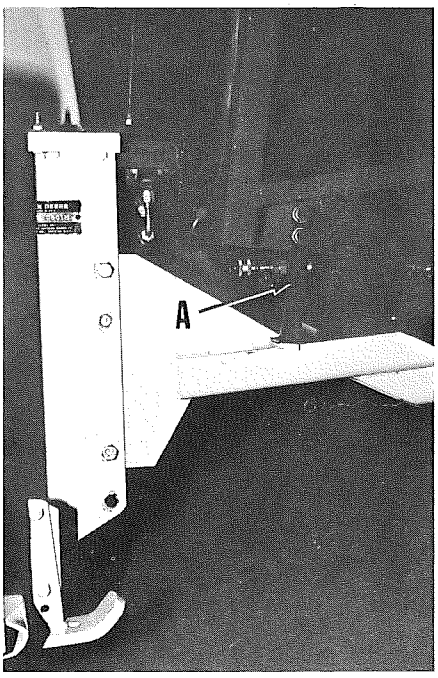

Figure 7

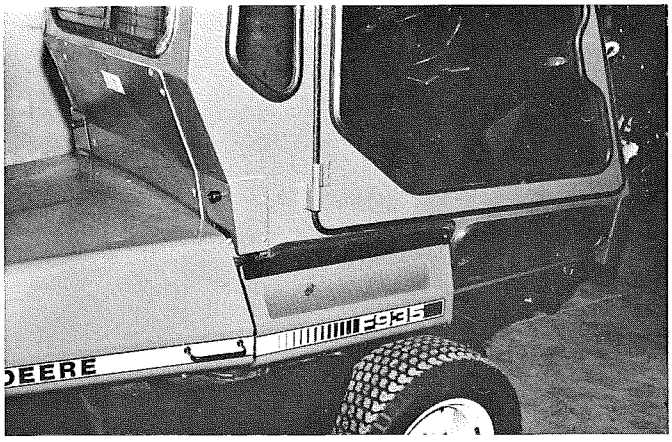

Figure 8

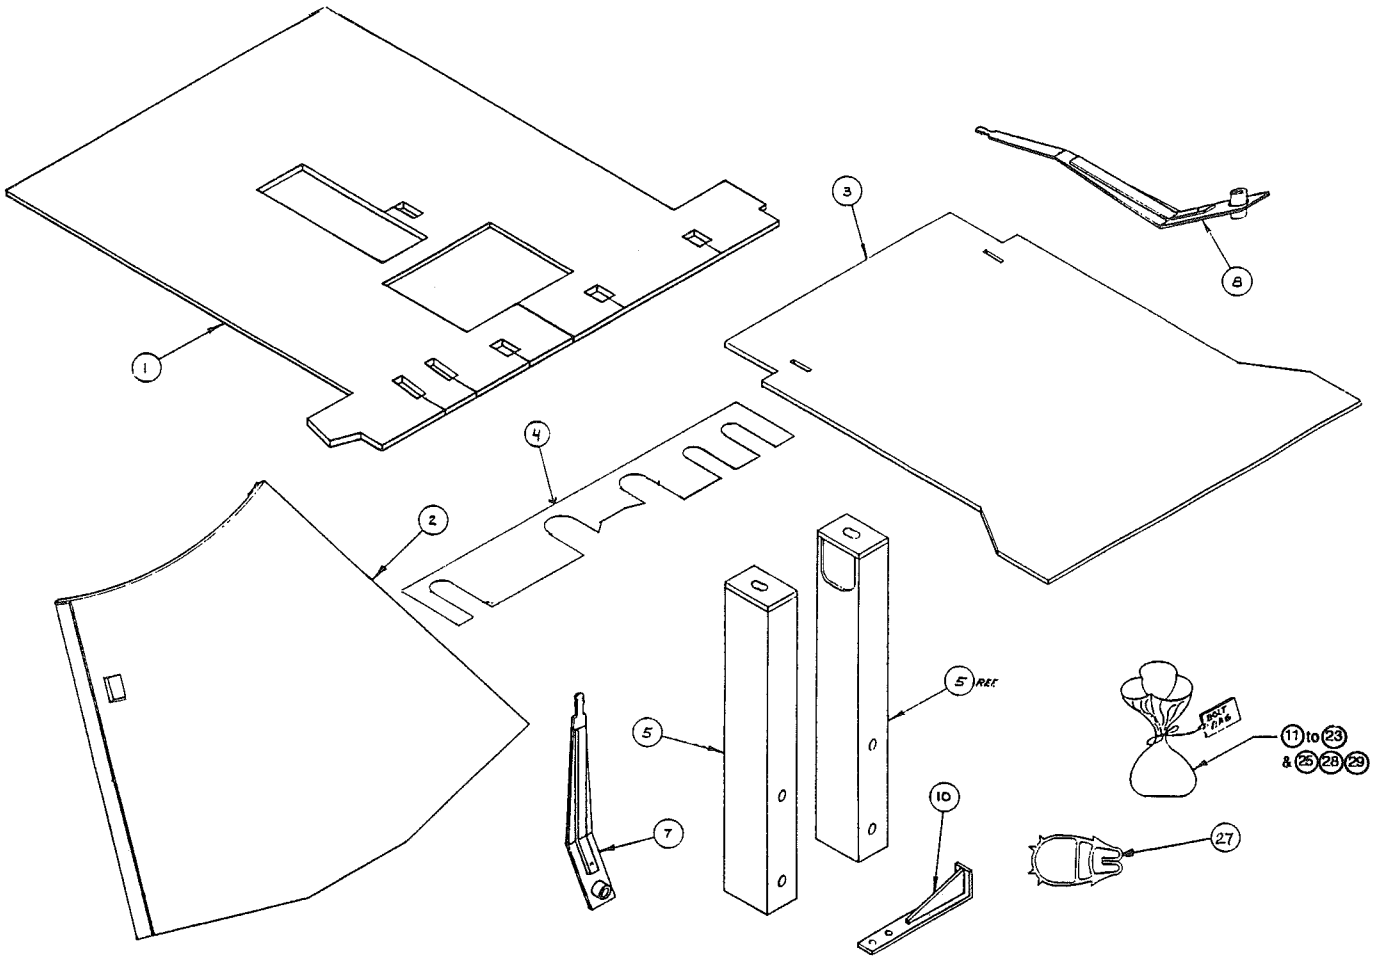

MOUNTING KITS
John Deere F-910, F-911, F-912, F-915, F-930, F-932, F-935
(4-11846)

(John Deere Serial# 86-360001 and Up)

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	1-27403	Floor Mat
2	1	1-25626	Steering Column Cover
3	1	1-25627	Seat Deck Cover
4	1	1-27391	Pedal Cover, Bolt on
5	2	2-12449-01	Rear Mount Weldment
7	1	2-12654	Implement, Lever Weldment, Inside
8	1	2-12653	Implement, Lever Weldment, Outside
10	2	2-12639	Snow Blower Stop Weldment
11	1	3-10287	Seat Belt
14	4	3-10213	Screw, M12 x 30 x 1.75 C Din 931, Hex-Cap
15	4	3-12427	Screw, M12 x 110 x 1.75 C Din 931.10, Hex-Cap, Gr. 10.9
16	2	3-10190	Screw, M16 x 40 x 2.00 C Din 931, Hex-Cap
17	2	3-10158	Screw, Hex Cap, 7/16"-14 x 1 1/2" NC, Grade 5
18	2	3-10152	Washer, Lock, Hel Spring, 7/16"
19	8	3-10079	Washer, Lock, Hel Spring, 1/2"
20	2	3-10080	Washer, Lock, Hel Spring, 5/8"
21	2	3-10066	Nut, Hex, 7/16"-14 NC
24	1	05-10131	Mounting Instructions
25	2	3-10132	Washer, Flat, Plain, 5/8" Type A, W Series
27	16"	3-10611	Large Straight Bubble, F911 only
28	4	1-34855	Spacer Rear Mount
29	4	3-10180	Nut, Hex 12mm

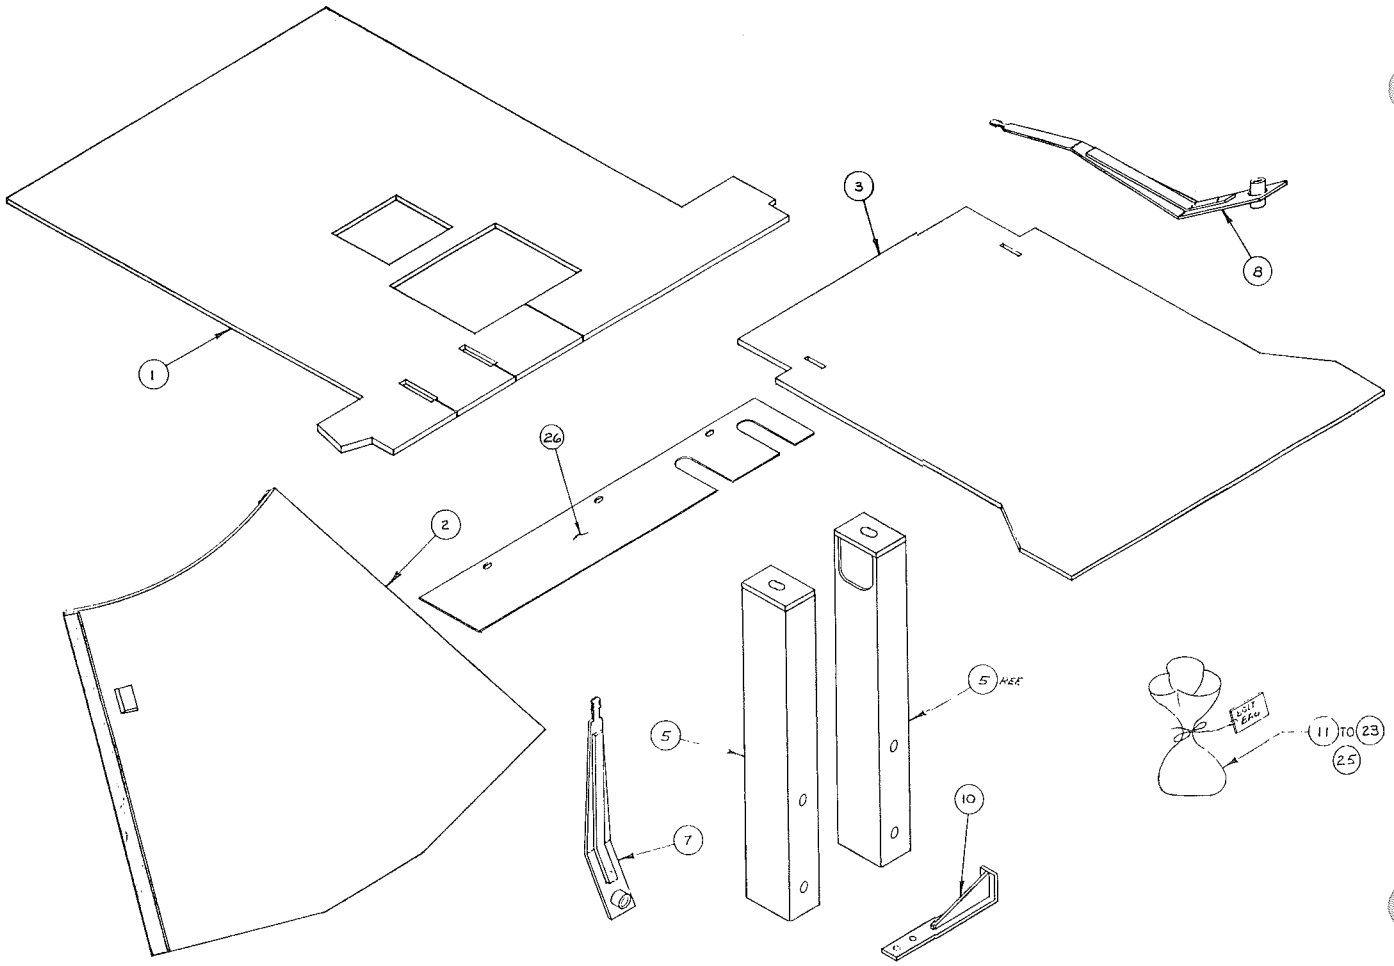

MOUNTING KITS
John Deere F-910, F-930
(4-11847)

(John Deere Serial# 86-360000 and Down)

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	1-25630	Floor Mat
2	1	1-25626	Steering Column Cover
3	1	1-25627	Seat Deck Cover
5	2	2-12449-01	Rear Mount Weldment
7	1	2-12654	Implement, Lever Weldment, Inside
8	1	2-12653	Implement, Lever Weldment, Outside
10	2	2-12639	Snow Blower Stop Weldment
11	1	3-10287	Seat Belt
14	4	3-10213	Screw, M12 x 30 x 1.75 C Din 931, Hex-Cap, Gr. 8.8
15	4	3-12427	Screw, M12 x 110 x 1.75 C Din 931.10, Hex-Cap, Gr. 10.9
16	2	3-10190	Screw, M16 x 40 x 2.00 C Din 931, Hex-Cap, Grade 8.8
17	2	3-10158	Screw, Hex Cap, 7/16"-14 x 1 1/2" NC, Grade 5
18	2	3-10152	Washer, Lock, Hel Spring, 7/16"
19	8	3-10079	Washer, Lock, Hel Spring, 1/2"
20	2	3-10080	Washer, Lock, Hel Spring, 5/8"
21	2	3-10066	Nut, Hex, 7/16"-14 NC
24	1	05-10131	Mounting Instructions
25	2	3-10132	Washer, Flat, Plain, 5/8" Type A, W Series
26	1	1-25359	Filler Front Floor Plate

MOUNTING INSTRUCTIONS
JOHN DEERE ROPS CAB
F1145 ONLY

1. Preparation of Tractor.
   A. Remove side access panel of console.
   B. Remove headlights if so equipped.
   C. Remove the seat and suspension.
   D. Install the tool box in the fender so it opens on the seat side.
   E. Tip hood open. Move the hold down ring 1.25" Drill a .25" hole, Figure #1.
   F. Remove the back panel from the cab.
   G. Remove the rubber on the reverse pedal for easier installation.

2. Installation of the Rear Mounts.
   A. Install right and left rear mounts into pockets on the machine frame. Fasten with 12mm x 110mm bolts, lockwashers, 3/8" spacers, and nuts, Figure #2-A.

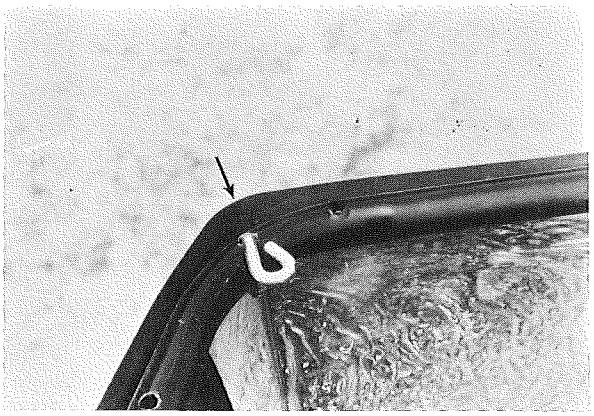

Figure 1

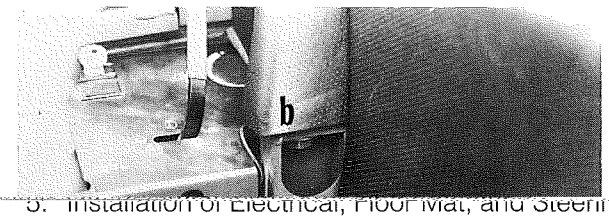

5. Installation of Electrical, Floor Mat, and Steering Column Cover.
   A. The hot wire for the cab options runs down the right rear leg. Plug the connector into the existing harness of the machine. Replace the console cover.
   B. Adjust the engine hood if required to clear the cab.
   C. Install the front floor plate.
      NOTE: The front floor plate can be removed for improved visibility when mowing, Figure #5-B.

3. Installation of Other Mounting Parts.
   A. If machine was equipped with optional headlights, cover plates will have to be purchased from John Deere and installed, Figure #3-A.
   B. Install under seat cover with the glue provided. Cut out seat mounting holes as required to attach seat, Figure #3-B.

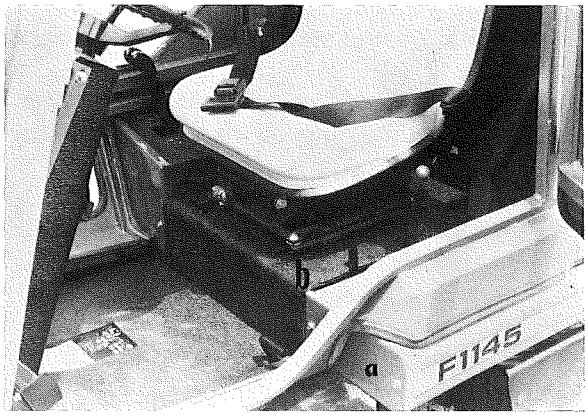

Figure 3

4. Installation of the Cab.
   A. Lower the cab onto the machine. Watch the pedals and hydraulic levers for clearance. Join the cab rear mounts to the machine rear mounts with 16mm x 40mm bolts, lockwashers, and flatwashers, Figure #2-B.
   B. Fasten the front mounts with 12mm x 30mm bolts and lockwashers. If the cab is to be used with a snowblower, install the snowblower bracket to the left front mount. This prevents the snowblower from breaking the windshield, Figure #4.
   C. Tighten all mounting bolts.
   D. Reinstall the removable back panel to the cab.
      NOTE: Follow the instructions on the decal on the back panel, Figure #2-C.

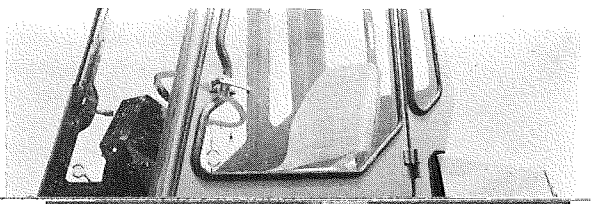

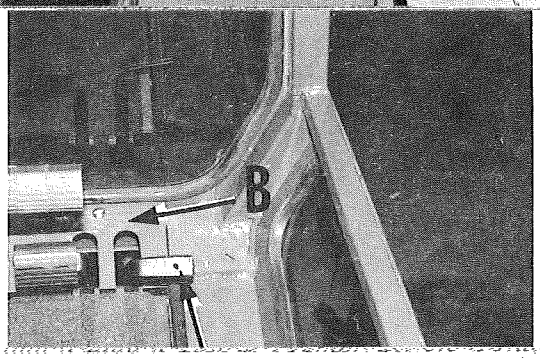

Figure #5-A and 1mm x 200 x 40mm into Cr